



Dimensions

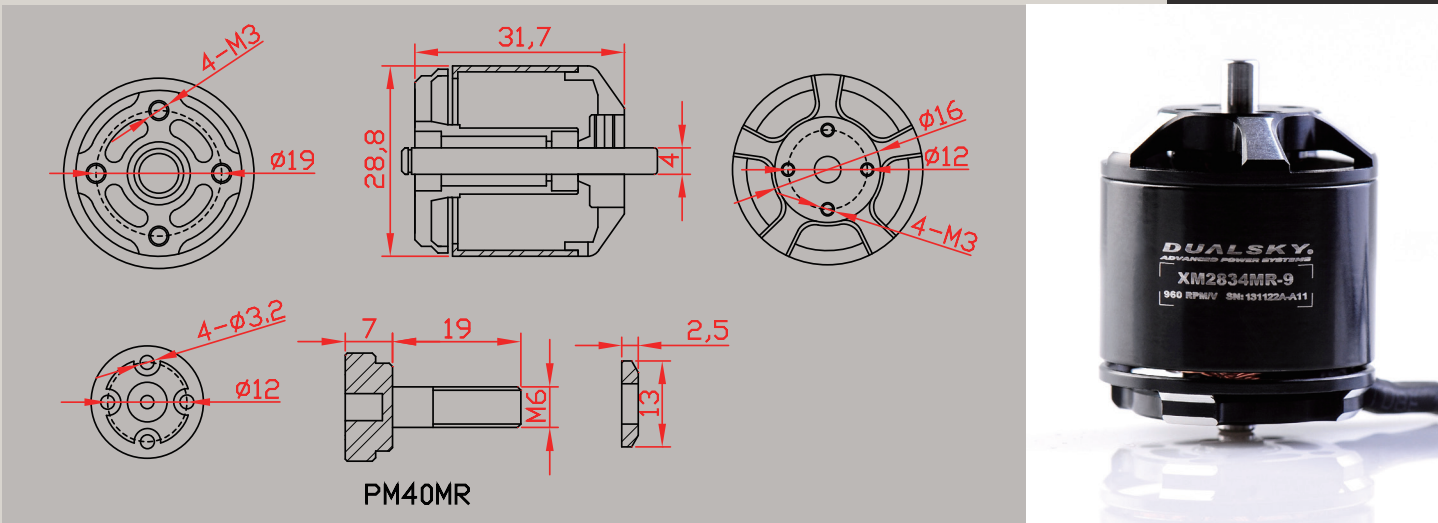

Specification

Xmotor Multi-Rotor		XM2834MR 9 TURNS	XM2834MR 10.5 TURNS
RPM/V(KV值)	(KV)	960	830
Weight w/o wires(重量)	(g)	70	70
Diameter(直径)	(mm)	28.8	28.8
Length(长度)	(mm)	32	32
Diameter of Shaft(轴径)	(mm)	4.0, 4.0	4.0, 4.0
Mounting holes pitch(安装孔距)	(mm)	19/19	19/19
Slots,Poles(极数)		12N14P	12N14P
Idle Current(空载电流)	(Io) @10V(A)	0.70	0.6
Resistance(内阻)	(Ri)(mOhm)	77	102
Cruising power(巡航功率)	(W)[8 mins]	137	156
Bursts current(最大电流)	(A)[15s]	23	19
Peak power(峰值功率)	(W)[15s]	250	284
Input wire(输入线)		20AWG, 400mm	20AWG, 400mm
Recommended ESC(推荐调速器)		XC-22-MR	XC-301-MR
Setup 1(配置1)	(No. of Cell, Prop.)	3S, 8x5-10x5	4S, 9x5
Weight of quad-copter(4轴重量)	(kg)	1.5	1.8
Weight of hex-copter(六轴重量)	(kg)	2.3	2.7

XM2834MR-9

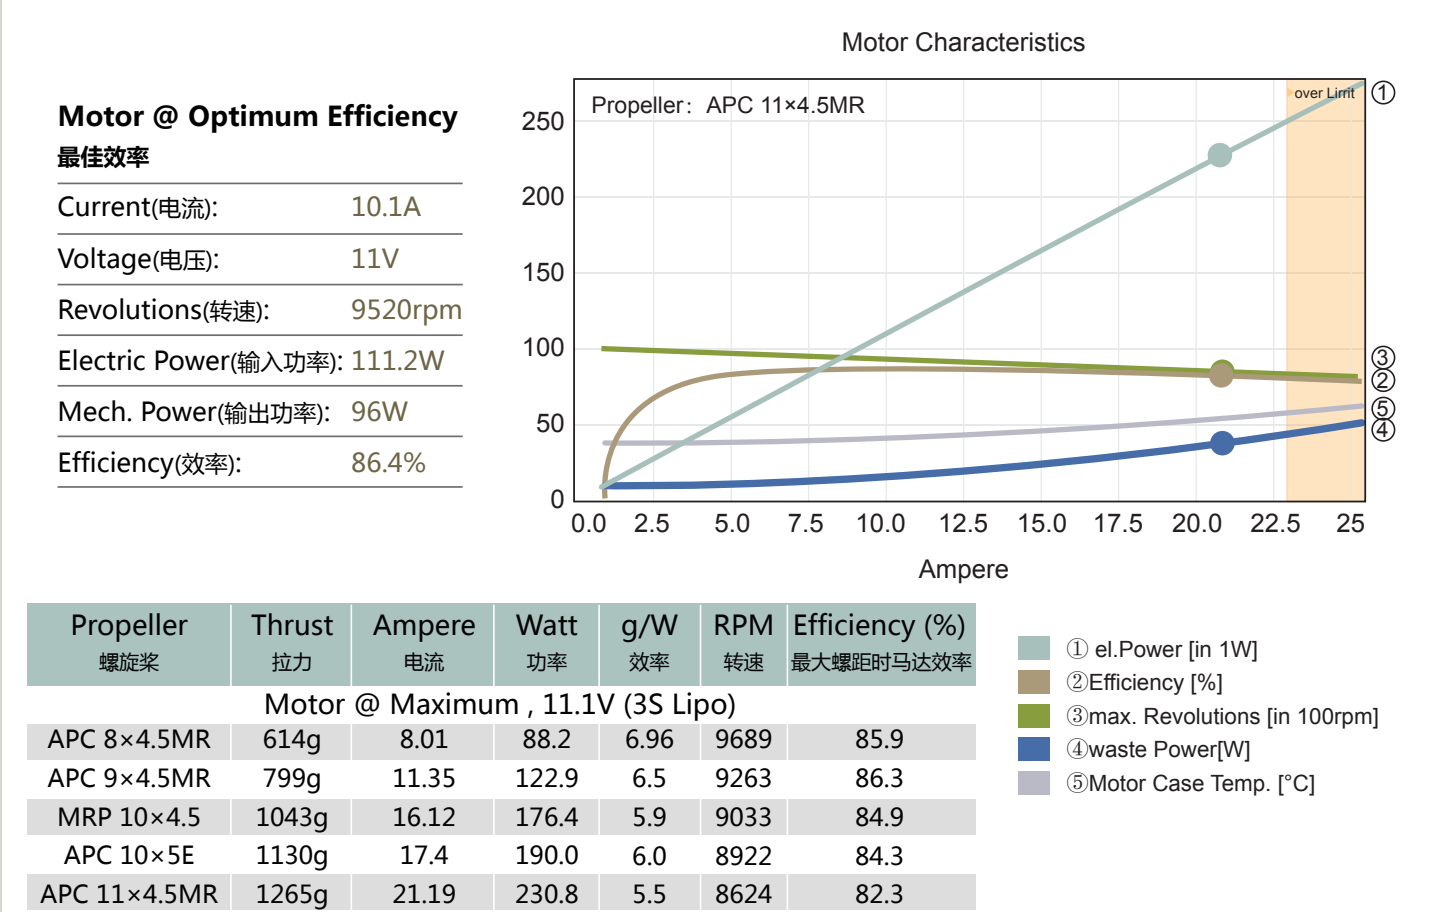

XM2834MR-10.5

