


Dimensions

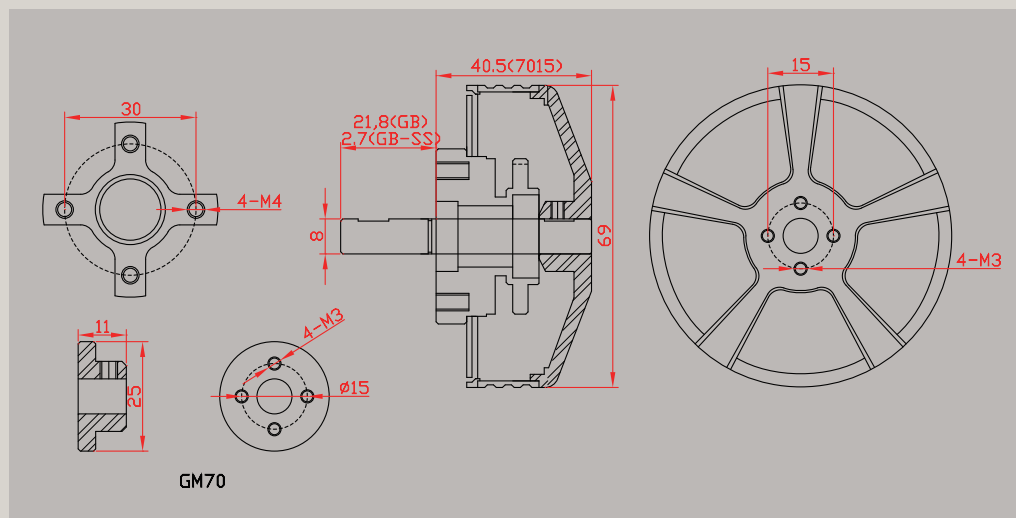

Specification

Xmotor Brushless Gimbal Outrunner	XM7015GB	XM7015GB-SS
Item NO. (商品编码)	51144	51145
Weight(g) (重量)	332	320
Motor dimension[DxL] (mm) (电机尺寸)	69x40.5	69x40.5
Stator dimension[DxL] (mm) (定子尺寸)	61.5x15	61.5x15
Configuration (配置)	24N28P	24N28P
Copper wire(OD,mm) (铜线)	0.30	0.30
Turns (圈数)	90	90
Winding type (盘式)	WYE	WYE
Max nominal voltage(V) (最高电压)	25	25
Resistance(Ri)(Ohm) (电阻)	15.6	15.6
Idle current@10V(mA)(空载电流)	93	93
Max.stall current(A) (最大瞬间电流)	2.9	2.9
Diameter of Shaft(mm) (轴径)	8.0	8.0
Length of Shaft (mm) (轴长)	20	N/A
Stator mounting holes[Pitch,Size](mm) (定子安装孔)	30, 4xM4	30, 4xM4
Rotor mounting holes[Pitch, Size] (mm) (转子安装孔)	15, 4xM3	15, 4xM3
Flexible wire solder board (灵活的焊线板)	Y	Y
Max.weight of gimbal/camera(kg) (云台或者相机的最大重量)	5.0	5.0
Memo (备注)	For yaw axis of RED EPIC&Frame(5kg)	