


Dimensions

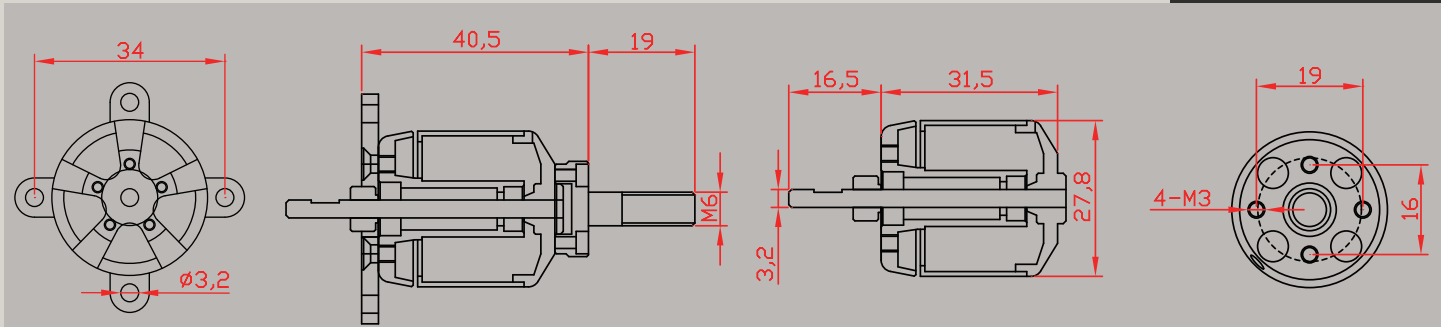

Specification

Dualsky Xmotor CA2 Series	XM2834CA			
Item No.(商品编码)	55291	55292	55293	55294
Model - Turns(马达转速)	XM2834CA-6	XM2834CA-7	XM2834CA-9	XM2834CA-10
RPM/V(KV)(KV值)	1460	1250	980	870
Stator Diameter(定子直径)	22	22	22	22
Magnet length(磁铁长度)	16	16	16	16
Shaft diameter(轴径)	3.2	3.2	3.2	3.2
Mountingholes pitch(安装孔距)	16/19	16/19	16/19	16/19
Weight(g)(重量)	70	70	70	70
Resistance(Ri)(mOhm)(电阻)	41	52	81	90
Idle Current(Io) @10V (A)(空载电流)	1.50	1.10	0.70	0.60
No.of Cells(LiPo)(电池节数)	2..3	2..3	2..3	2..4
Max. EfficiencyCurrent[A](效率电流)	22	20	17	15
Max. Burst Current (15s)[A](最大电流)	30	28	24	20
Max. Power(15s)(最大功率)	Approx260W	Approx260W	Approx260W	Approx260W
Input Connectors[mm](金插)	GC3	GC3	GC3	GC3
Recommended ESC(推荐调速器)	XC3012BA	XC3012BA	XC2512BA	XC2512BA
Prop. Range(螺旋桨)	2S Lipo 11x6	10x5...12x6	10x5...12x6	3S Lipo 12x6
App. Class(适用机种)	450 Class, 600-1100g	450 Class, 600-1200g	450 Class, 600-1200g	450 Class, 700-1400g